
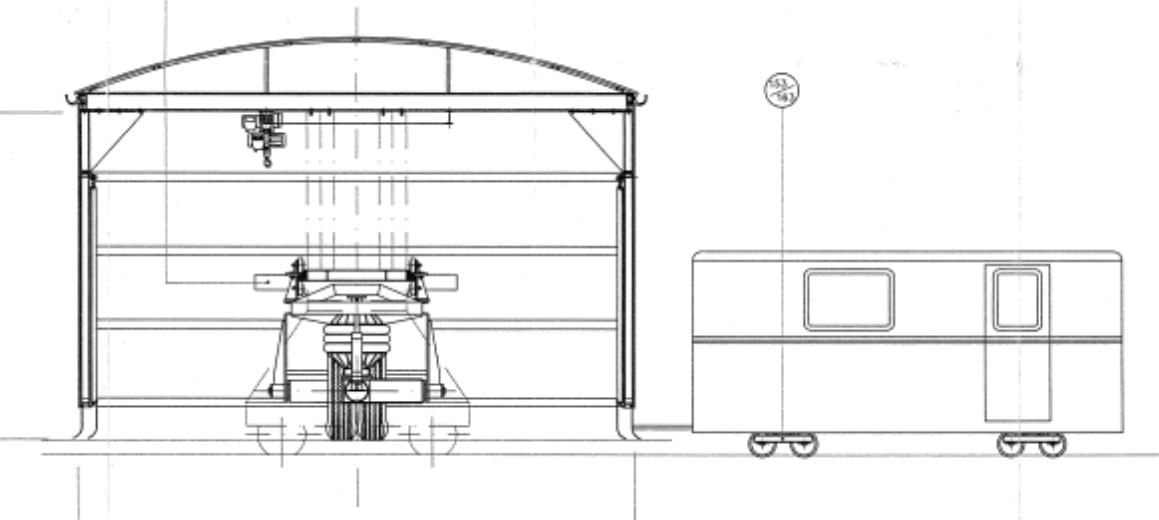


LINTRACK features

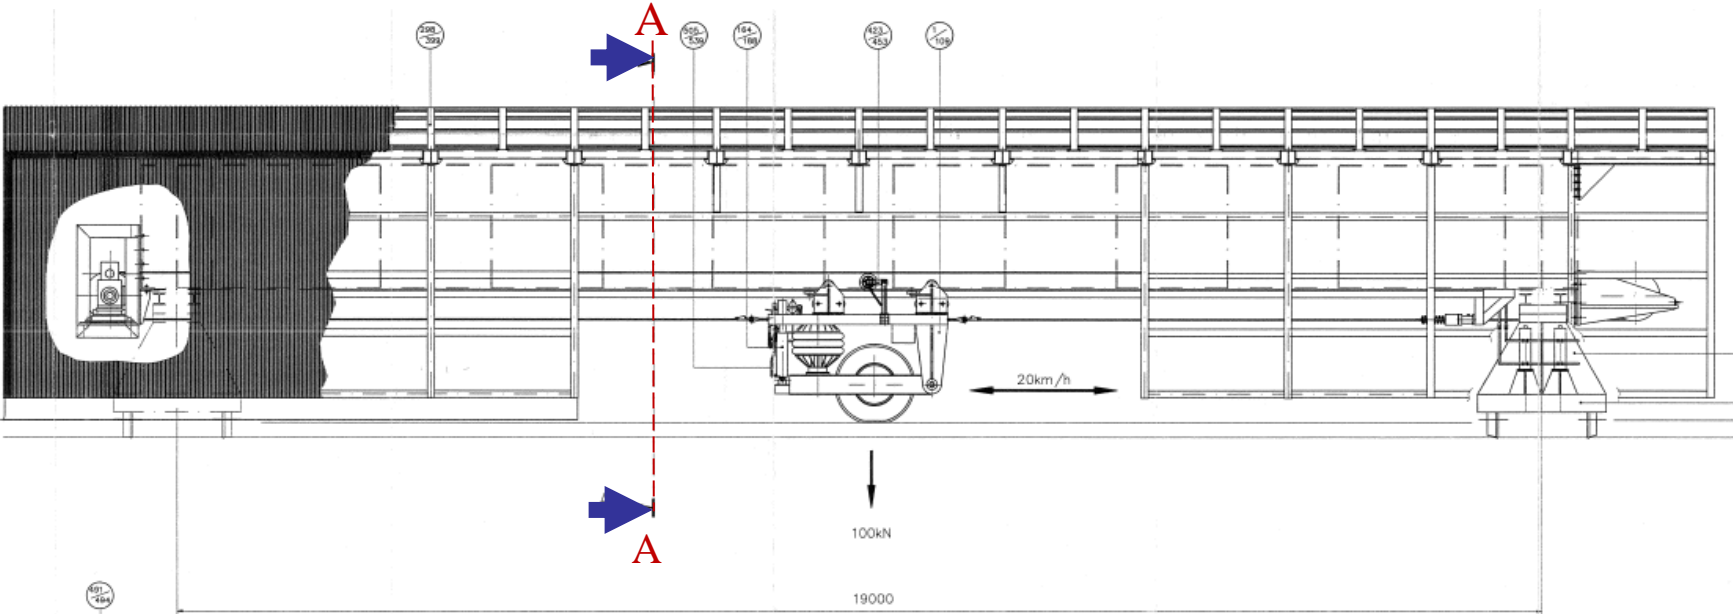

Section A - A

LINTRACK test facility

Max Speed 20 km/h

Enclosed chamber with heating facility up to 80°C

Equipped with Computerised control

Different Tires can be mounted


Possibility of wheel wandering

Max Load 100 kN


Whole facility movable on railway tracks




Ongoing LINTRACK testing program

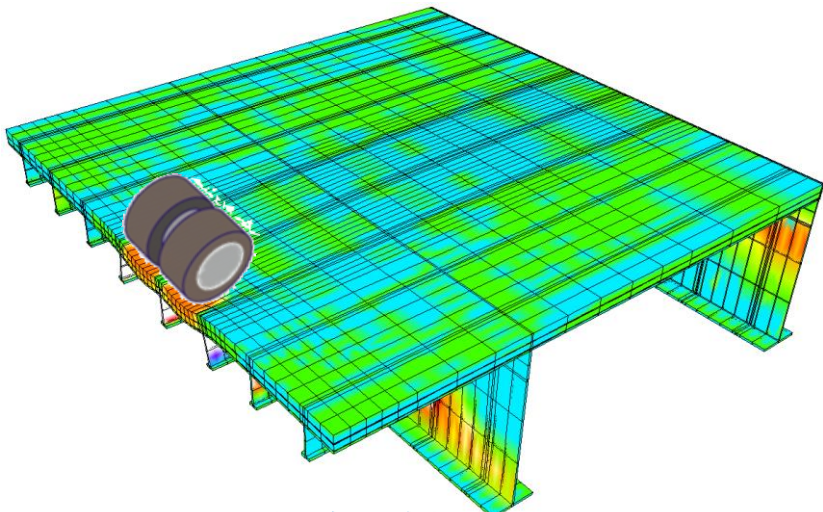


Steel Deck Bridges

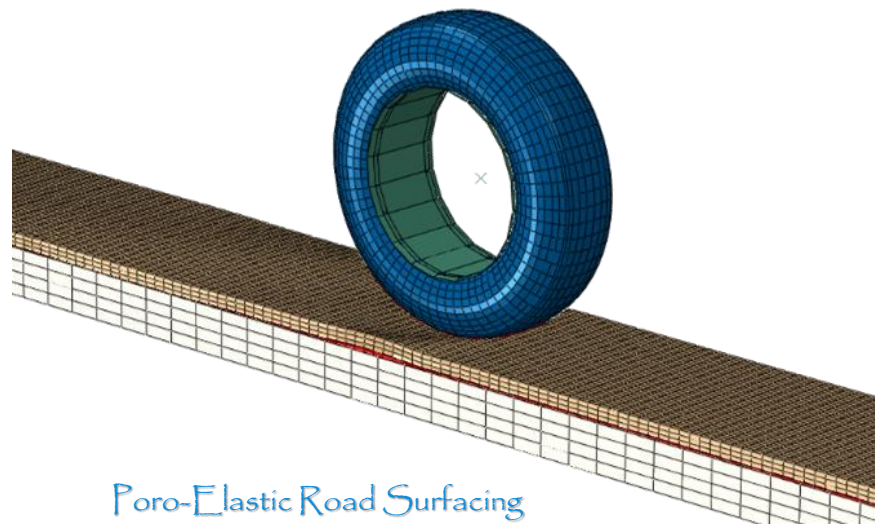

Poro-Elastic Road Surfacing

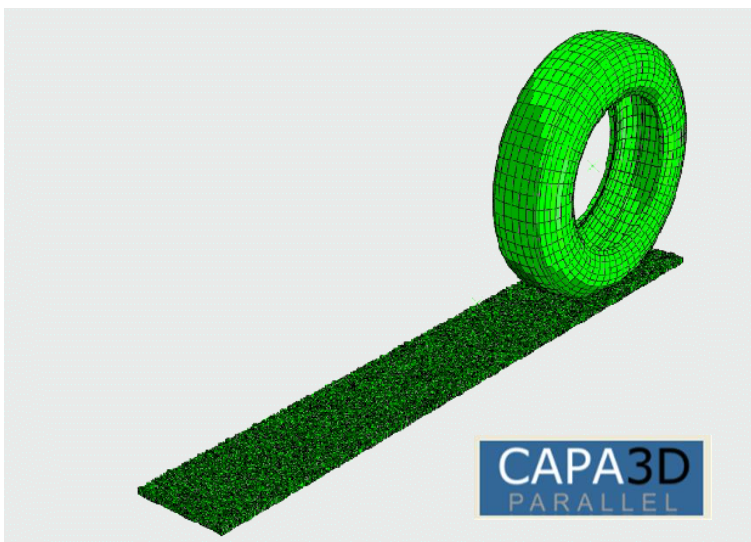

SKID & Rolling resistance

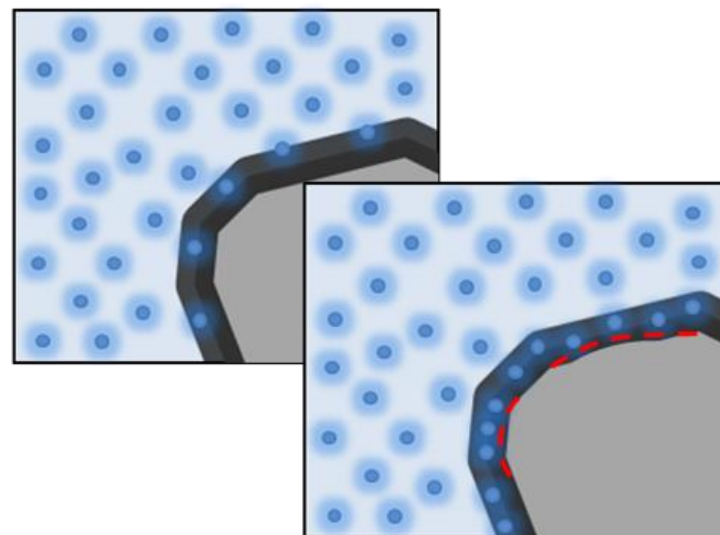


Aging

Asphalt Surfacing on Steel Deck Bridges



Asphalt Surfacing on Steel Deck Bridges

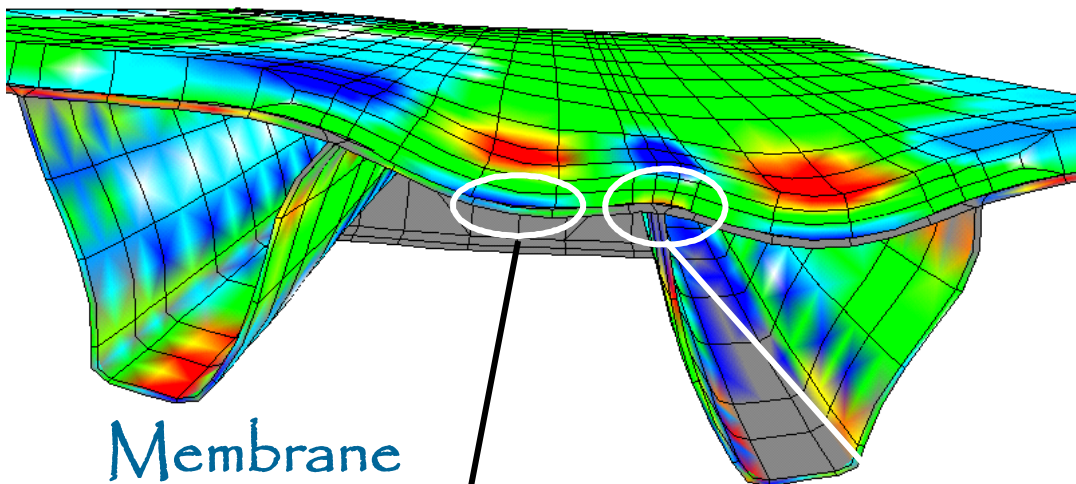

Membrane adhesive failures

