

# Numerical modeling of parallel-plate based AMR

Kaspar K. Nielsen<sup>a,b</sup>, K. Engelbrecht<sup>b</sup> and N. Pryds<sup>b</sup>.

<sup>a)</sup> Technical University of Denmark, Department of Mechanical Engineering.

<sup>b)</sup> Risø National Laboratory for Sustainable Energy, Technical University of Denmark.

# Outline

- The Danish effort in magnetic refrigeration
- Focus on the modeling
- Results from both experiment and modeling
- Discussion

# Risø's work on magnetic refrigeration

## Partnership between




Duration: 4 years

- Starting date: 01.01.2007
- Ending date: 31.12.2010

Funding: € 2.6M

- 5 Ph.D. students
- 3 Postdocs

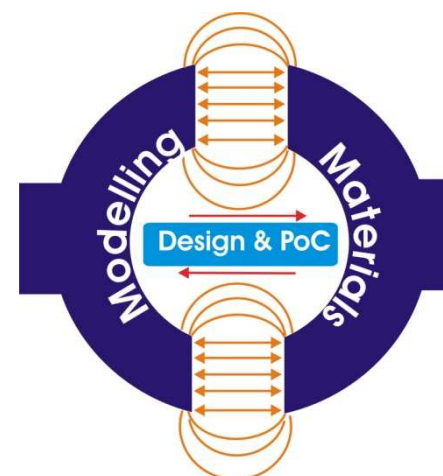


## Challenges

**Demonstrate cost-effective systems at commercially relevant temperature spans with high efficiency and environmentally friendly materials**

# Configuration of our effort





Development of prototype

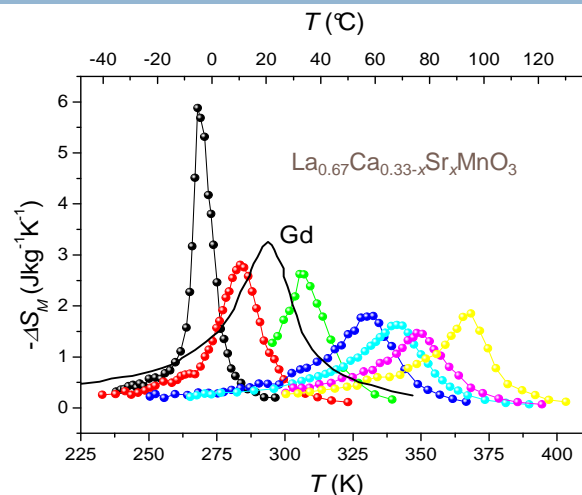

Modeling of both AMR and permanent magnet


Materials research:

- New materials
- Characterization, evaluation and processing of relevant materials

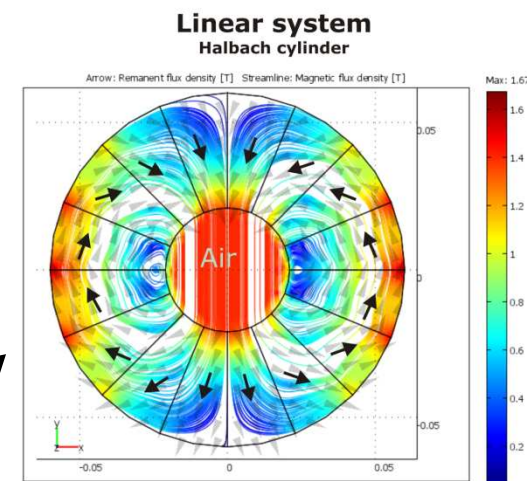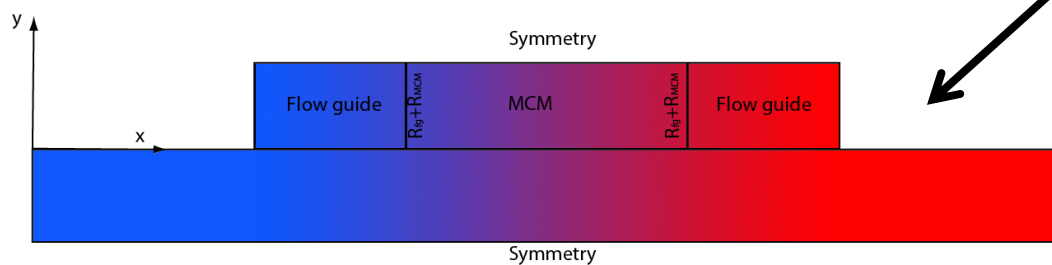

# Details on the experiment

- Parallel plate based AMR
- Reciprocating
- Permanent magnet
- Materials used include Gd and  $\text{LaCaSrMnO}_3$
- Plate thickness from 0.3 to 0.9 mm
- Channel thickness from 0.5 to 1.0 mm


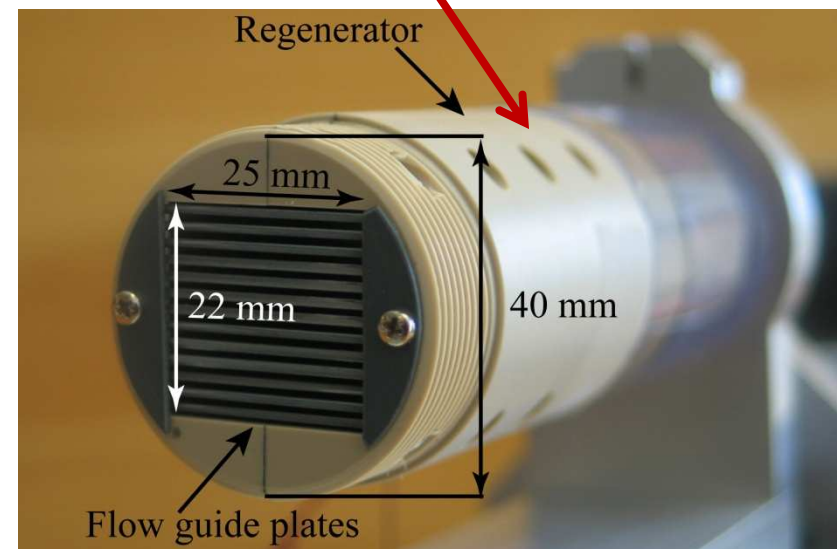


# Plates for the regenerator

Example of  $\text{La}_{0.67}\text{Ca}_{0.26}\text{Sr}_{0.07}\text{Mn}_{1.05}\text{O}_3$  plates  
(40x25x0.3 mm)



# The permanent Halbach magnet

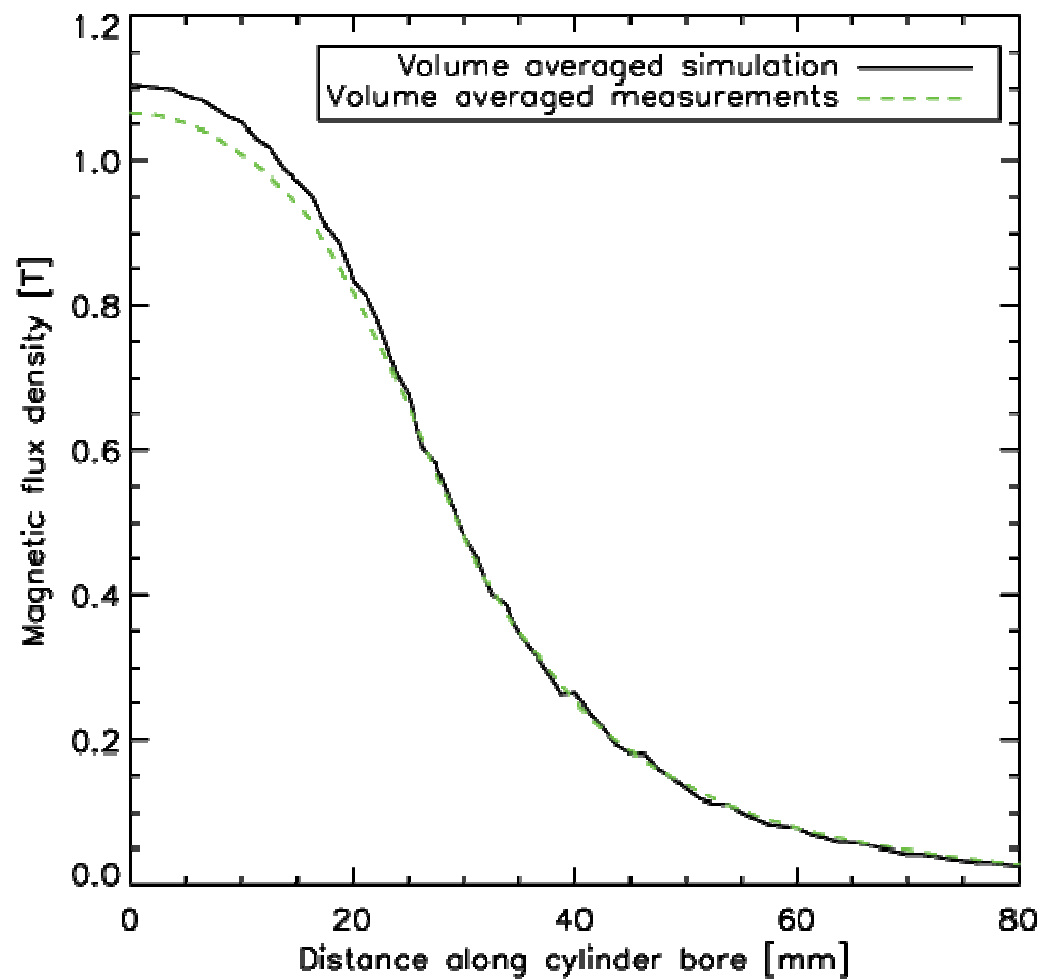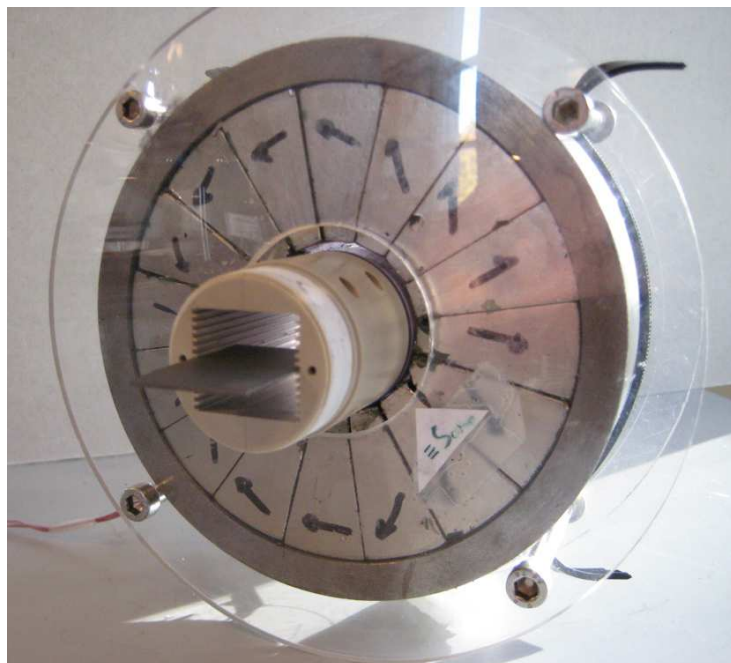



# Numerical AMR modeling

## Key features of our numerical AMR model

- 2.5-dimensional
- Parallel-plate based
- Versatile
- Fast!



# Schematic of the model

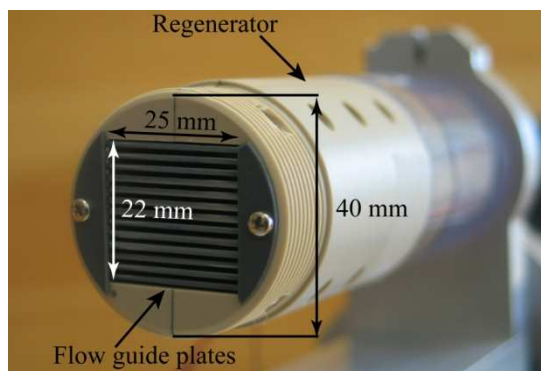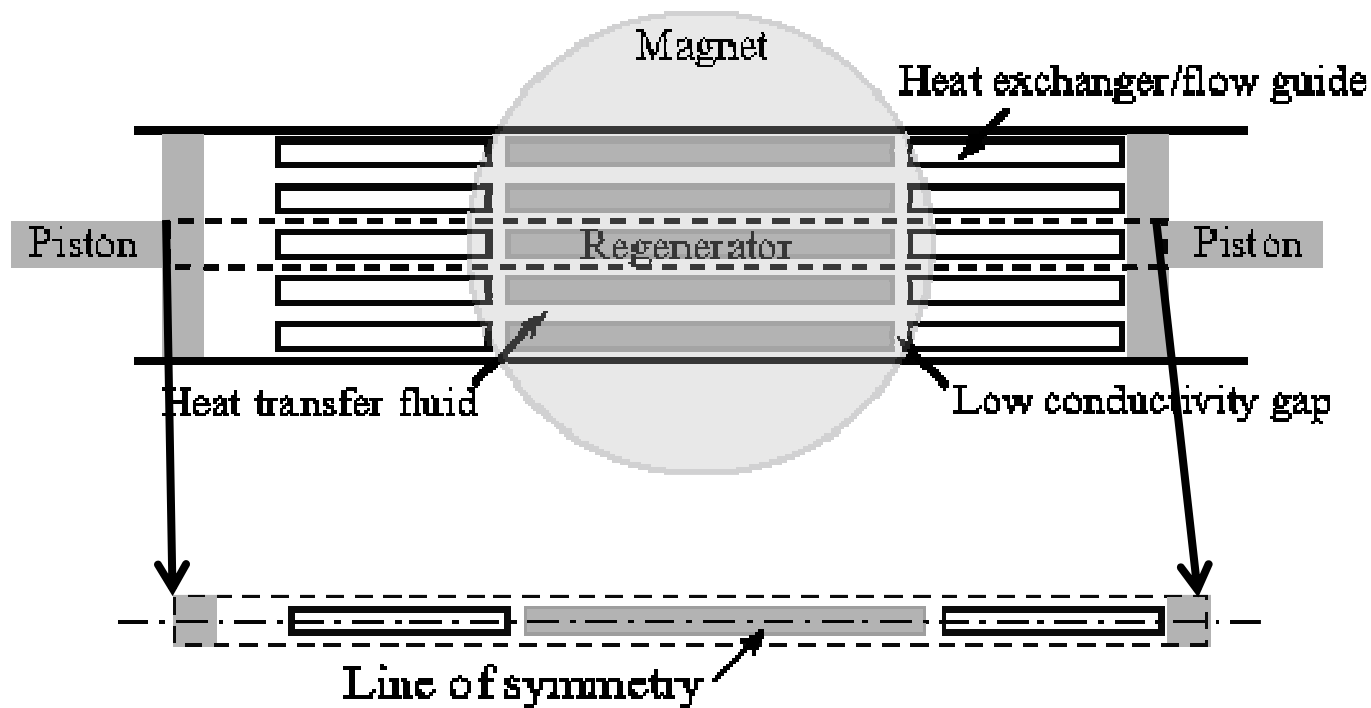

# Details of the model

$$\rho_{MCM} c_{p,MCM} \frac{\partial T_{MCM}}{\partial t} = k_{MCM} \nabla^2 T_{MCM} + Q_{MCE} + \frac{T_{\infty} - T_{MCM}}{dV \sum R_{MCM}} + Q_{bdry}$$

$$\rho_{fg} c_{p,fg} \frac{\partial T_{fg,1}}{\partial t} = k_{fg} \nabla^2 T_{fg,1} + \frac{T_{\infty} - T_{fg,1}}{dV \sum R_{fg}} + Q_{bdry}$$

$$\rho_{fg} c_{p,fg} \frac{\partial T_{fg,2}}{\partial t} = k_{fg} \nabla^2 T_{fg,2} + \frac{T_{\infty} - T_{fg,2}}{dV \sum R_{fg}} + Q_{bdry}$$

Symmetry

$$\rho_{fl} c_{p,fl} \left( \frac{\partial T_{fl}}{\partial t} + u \cdot \nabla T_{fl} \right) = k_{fl} \nabla^2 T_{fl} + \frac{T_{\infty} - T_{fl}}{dV \sum R_{fl}} + Q_{bdry}$$

Symmetry

# Details of the model




		x						
		Plastic tube						
z	Piston	$R_{\text{fluid}}+R_{\text{pl}}+R_{\text{conv}}$	$R_{\text{fg}}+R_{\text{pl}}+R_{\text{conv}}$	$R_{\text{MCM}}+R_{\text{pl}}+R_{\text{conv}}$	$R_{\text{fg}}+R_{\text{pl}}+R_{\text{conv}}$	$R_{\text{fluid}}+R_{\text{pl}}+R_{\text{conv}}$	$R_{\text{pist}}+R_{\text{conv}}$	Piston
		Fluid	Flow guide	MCM	Flow guide	Fluid		
		$R_{\text{fluid}}+R_{\text{pl}}+R_{\text{conv}}$	$R_{\text{fg}}+R_{\text{pl}}+R_{\text{conv}}$	$R_{\text{MCM}}+R_{\text{pl}}+R_{\text{conv}}$	$R_{\text{fg}}+R_{\text{pl}}+R_{\text{conv}}$	$R_{\text{fluid}}+R_{\text{pl}}+R_{\text{conv}}$		
		Plastic tube						

# Experiments and modeling


Each experiment was configured as follows

- 13 plates of commercial grade Gd (92 g)
- Plate thickness: 0.9 mm
- Channel thickness: 0.8 mm
- A cycle timing of 9 s


# Heat load results

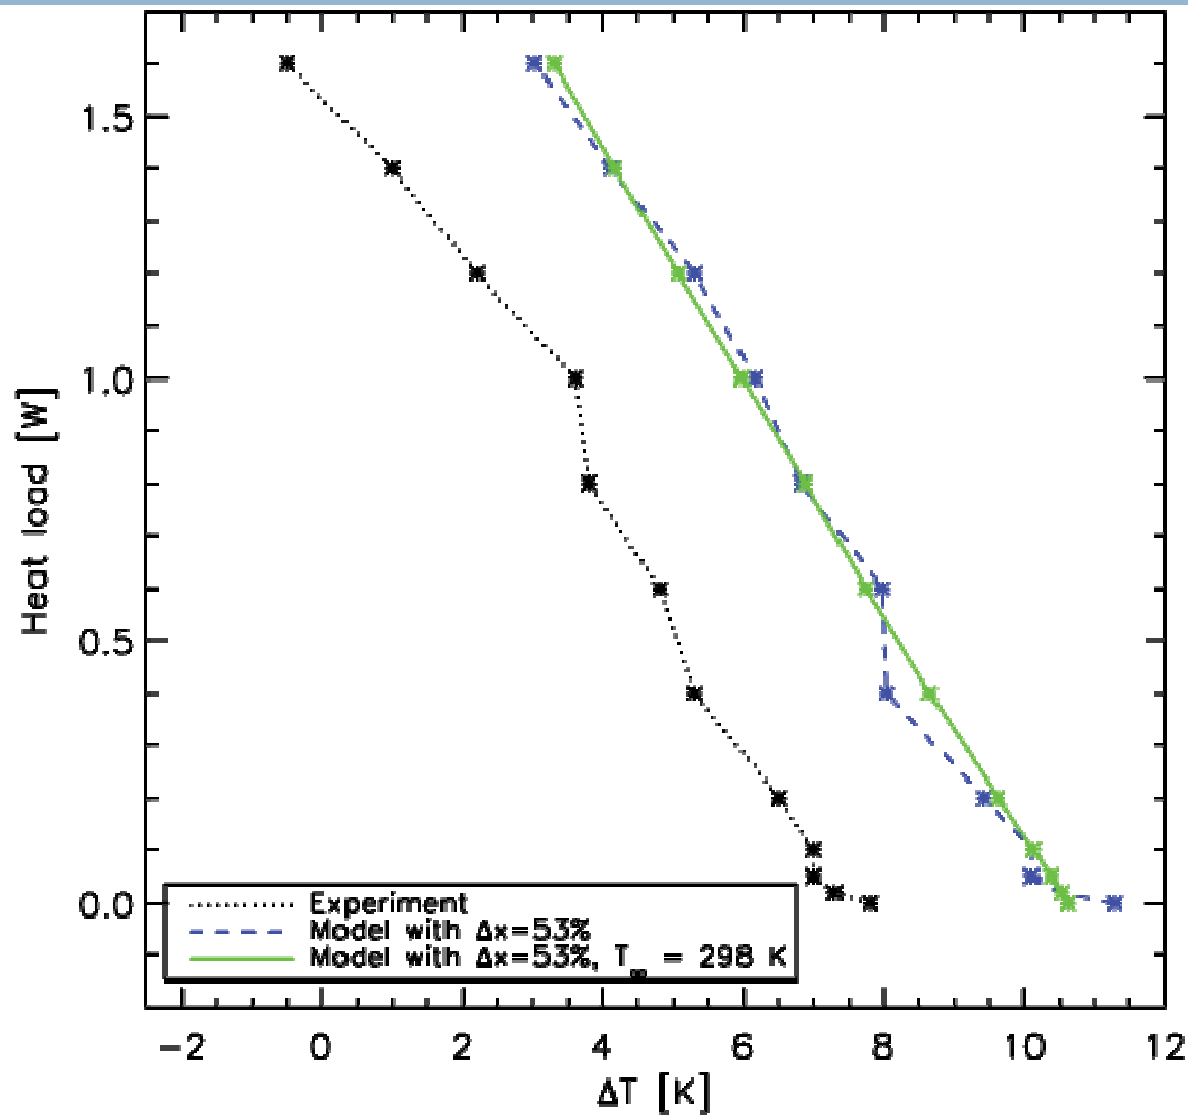

# Fluid movement results

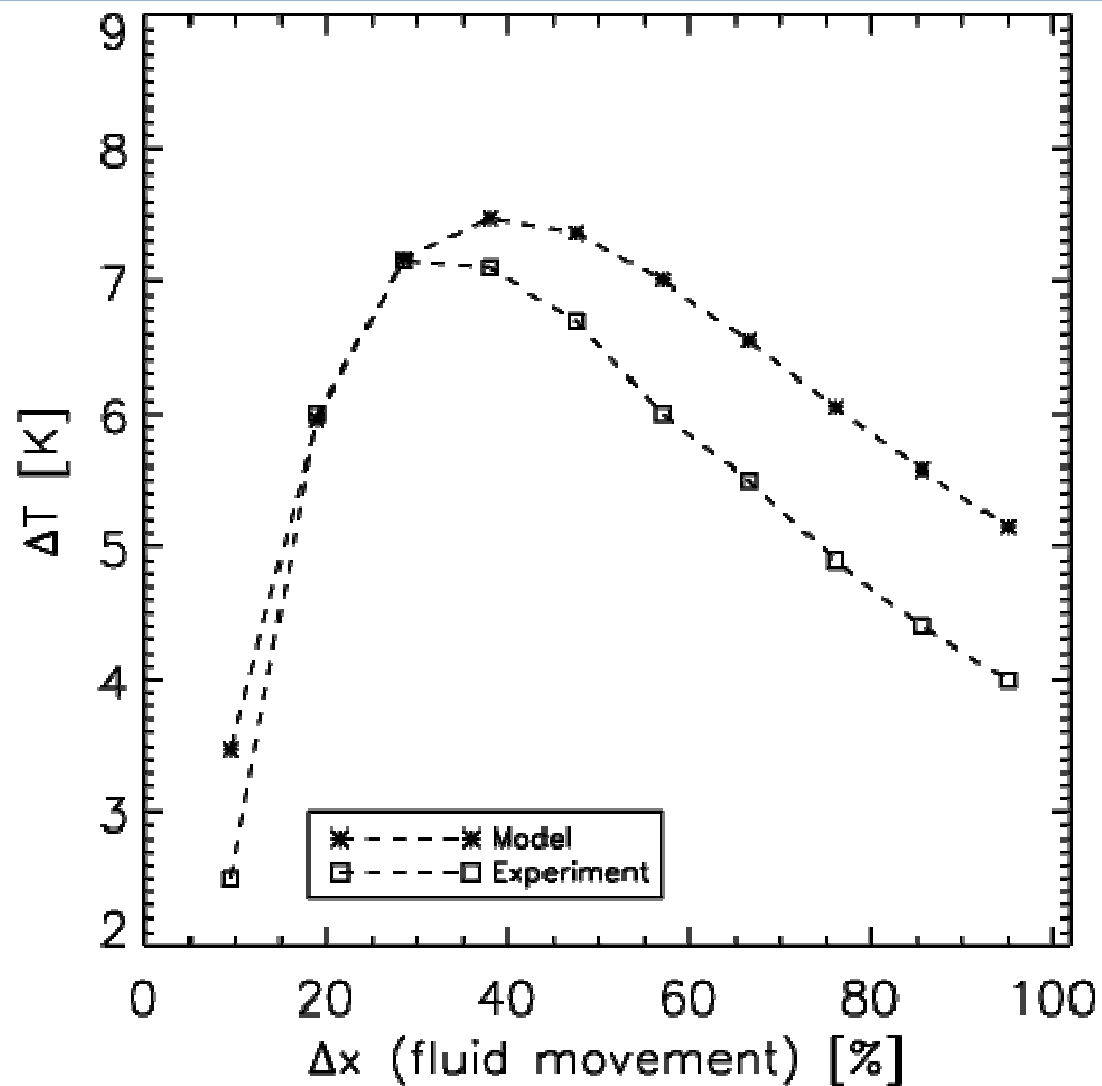

# Timing results

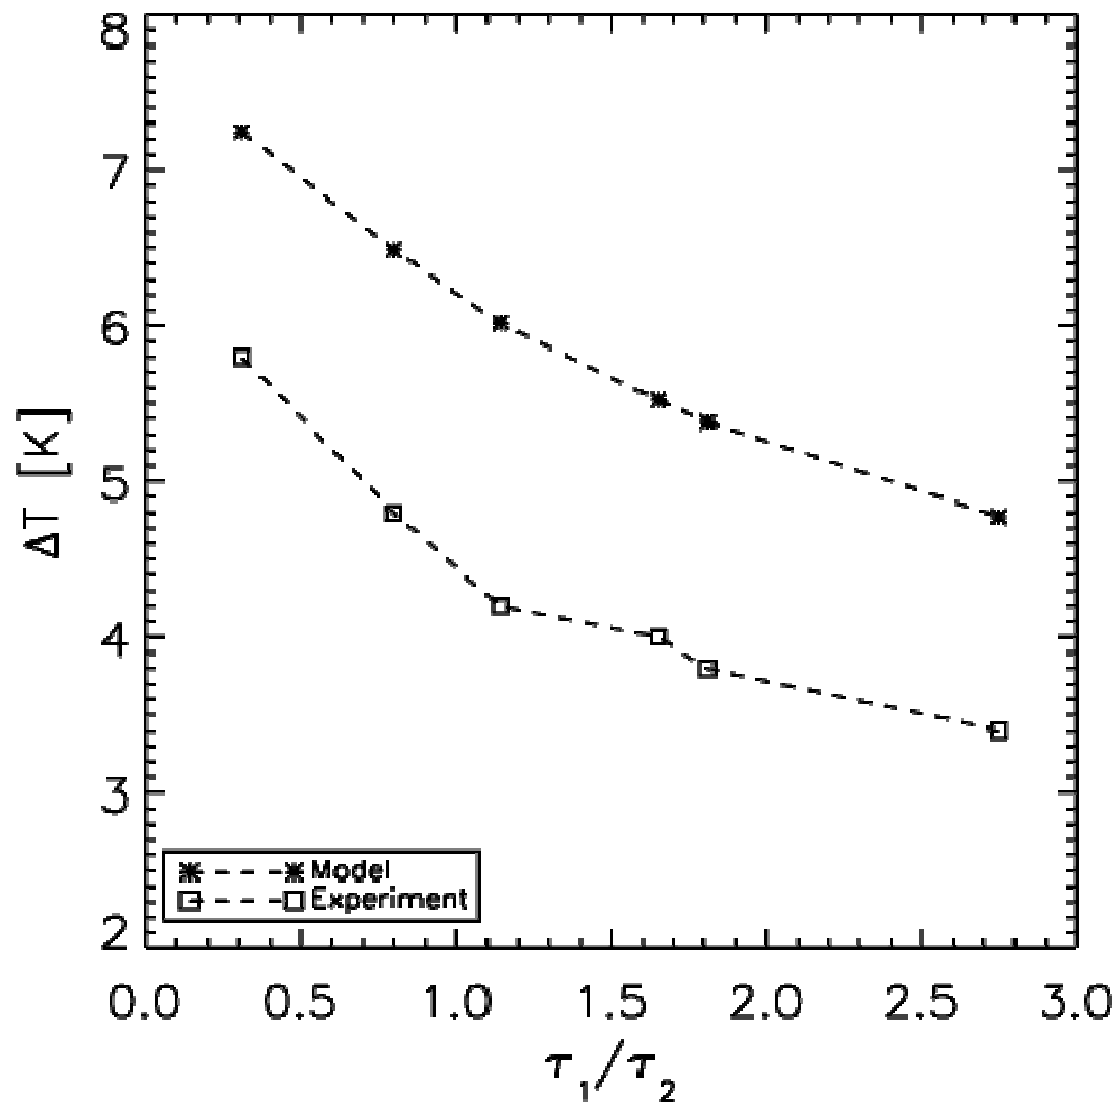

# Summary and Conclusion

- A versatile experimental AMR was presented
- A corresponding advanced 2.5D numerical model was described
- Selected results from experiment and model were compared and to a certain extent the agreement is satisfactory



# Future work

- Further development of the model to include e.g. passive regeneration and composite materials
- Present large range of experiments with corresponding modeling of various materials
- Detailed study of demagnetization effects
- Work on composite materials

# References

- Petersen, T. F.; Pryds, N.; Smith, A.; Hattel, J.; Schmidt, H. & Knudsen, H.  
"Two-dimensional mathematical model of a reciprocating room-temperature Active Magnetic Regenerator"  
*International Journal of Refrigeration*, **2008**, 31, 432-443
- Bjørk, R.; Bahl, C. R. H.; Smith, A. & Pryds, N.  
"Optimization and improvement of Halbach cylinder design"  
*Journal of Applied Physics, AIP*, **2008**, 104, 013910
- Bahl, C.; Petersen, T.; Pryds, N. & Smith, A.  
"A versatile magnetic refrigeration test device"  
*Review of Scientific Instruments*, **2008**, 79, 093906